


DECOSTAR® 51 STANDARD, DECOSTAR® 51S STANDARD



Product reference	Product number	W	V	°	cd		d max. [mm]	l max. [mm]	t [h]	No.	
DECOSTAR® 51 STANDARD, Ø 51 mm, without DECO shield											
41860SP ¹⁾	4050300012612	20	12	10	3150	GU5.3	51	45	2000	1	20
41860WFL ¹⁾	4050300012629	20	12	36	510	GU5.3	51	45	2000	1	20
41865SP ¹⁾	4050300026527	35	12	10	6300	GU5.3	51	45	2000	1	20
41865WFL ¹⁾	4050300026541	35	12	36	1050	GU5.3	51	45	2000	1	20
41870SP ¹⁾	4050300012636	50	12	10	8200	GU5.3	51	45	2000	1	20
41870WFL ¹⁾	4050300012575	50	12	36	1500	GU5.3	51	45	2000	1	20
DECOSTAR® 51S STANDARD, Ø 51 mm, with shield											
44860SP	4050300272474	20	12	10	3000	GU5.3	51	45	2000	2	20
44860WFL	4050300272511	20	12	36	480	GU5.3	51	45	2000	2	20
44865SP	4050300272559	35	12	10	6000	GU5.3	51	45	2000	2	20
44865WFL	4050300272634	35	12	36	1000	GU5.3	51	45	2000	2	20
44870SP	4050300272672	50	12	10	7800	GU5.3	51	45	2000	2	20
44870WFL	4050300272795	50	12	36	1450	GU5.3	51	45	2000	2	20

- Average life of 2000 hours
- Dichroic reflector reduces the heat in the light beam by up to 66%
- Approved for use in open luminaires to IEC 60598-1
- UV-FILTER
- Dimmable
- Colour temperature of 3000 K

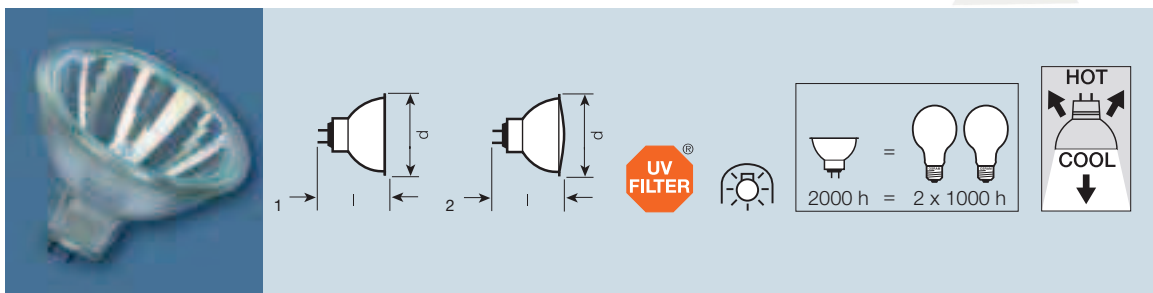