


# Metal halide lamps

## R111 reflector, GX8.5 base, for open and enclosed luminaires

### POWERBALL® ceramic technology

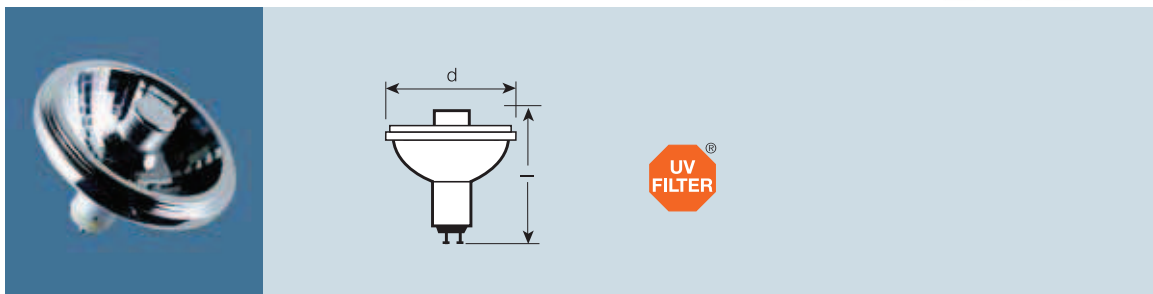

Product reference	Product number	W		cd		d [mm]	l max. [mm]		
<b>POWERBALL® HCI®-R111</b>									
HCI-R111 20/830 WDL PB 10D <sup>1)</sup>	4008321 <b>907998</b>	20	10	17000	GX8.5	111	95	6	
HCI-R111 20/830 WDL PB 24D <sup>1)</sup>	4008321 <b>908001</b>	20	24	4200	GX8.5	111	95	6	
HCI-R111 20/830 WDL PB 40D <sup>1)</sup>	4008321 <b>908018</b>	20	40	2000	GX8.5	111	95	6	
HCI-R111 35/830 WDL PB 10D <sup>1)</sup>	4008321 <b>908025</b>	39	10	35000	GX8.5	111	95	6	
HCI-R111 35/830 WDL PB 24D <sup>1)</sup>	4008321 <b>908032</b>	39	24	8500	GX8.5	111	95	6	
HCI-R111 35/830 WDL PB 40D <sup>1)</sup>	4008321 <b>908049</b>	39	40	4000	GX8.5	111	95	6	
HCI-R111 35/942 NDL PB 10D <sup>1)</sup>	4008321 <b>908056</b>	39	10	35000	GX8.5	111	95	6	
HCI-R111 35/942 NDL PB 24D <sup>1)</sup>	4008321 <b>908063</b>	39	24	8500	GX8.5	111	95	6	
HCI-R111 35/942 NDL PB 40D <sup>1)</sup>	4008321 <b>908070</b>	39	40	4000	GX8.5	111	95	6	
HCI-R111 70/830 WDL PB 10D <sup>1)</sup>	4008321 <b>908087</b>	72	10	55000	GX8.5	111	95	6	
HCI-R111 70/830 WDL PB 24D <sup>1)</sup>	4008321 <b>908094</b>	72	24	15000	GX8.5	111	95	6	
HCI-R111 70/830 WDL PB 40D <sup>1)</sup>	4008321 <b>908100</b>	72	40	9000	GX8.5	111	95	6	

#### New

POWERBALL® HCI®-R111 with R111 reflector are approved for use in open luminaires and UV-reduced.

Lamps for open luminaires (see 5.16).

#### Benefits

- At last a high-intensity solution with a modern R111 reflector, low thermal loading and long life
- The new twist & lock GX8.5 base ensures stable positioning in the luminaire
- UV FILTER technology (see 5.04)
- All the benefits of innovative POWERBALL® technology (see 5.04), such as excellent colour rendering, low colour spread, constant colour and high luminous flux

#### Applications

All indoor lighting, in particular

- Shops
- Malls
- Museums
- Atriums
- Hotels
- Prestige rooms

