


Product reference	Product number	W	V	°	cd		d max. [mm]	l max. [mm]	t [h]	
<b>DECOSTAR® 51 TITAN reflector lamp, Ø 51 mm</b>										
46860SP	4050300428635	20	12	10	5000	GU5.3	51	45	4000	20
46860WFL	4050300428659	20	12	36	780	GU5.3	51	45	4000	20
46860VWFL	4050300428673	20	12	60	350	GU5.3	51	45	4000	20
46865SP	4050300428697	35	12	10	9100	GU5.3	51	45	4000	20
46865FL	4050300476414	35	12	24	3100	GU5.3	51	45	4000	20
46865WFL	4050300428710	35	12	36	1500	GU5.3	51	45	4000	20
46865VWFL	4050300428734	35	12	60	700	GU5.3	51	45	4000	20
46870SP	4050300428758	50	12	10	12500	GU5.3	51	45	4000	20
46870FL	4050300465708	50	12	24	4400	GU5.3	51	45	4000	20
46870WFL	4050300428772	50	12	36	2200	GU5.3	51	45	4000	20
46870VWFL	4050300428796	50	12	60	1100	GU5.3	51	45	4000	20

- Long average life of 4000 hours
- High luminous intensity
- Constant luminous intensity and colour location throughout their life
- Constant bluish appearance of the light escaping at the back of the reflector
- Dichroic reflector reduces the heat in the light beam by up to 66%
- Approved for use in open luminaires to IEC 60598-1
- UV-FILTER
- Dimmable
- Colour temperature of 3000 K

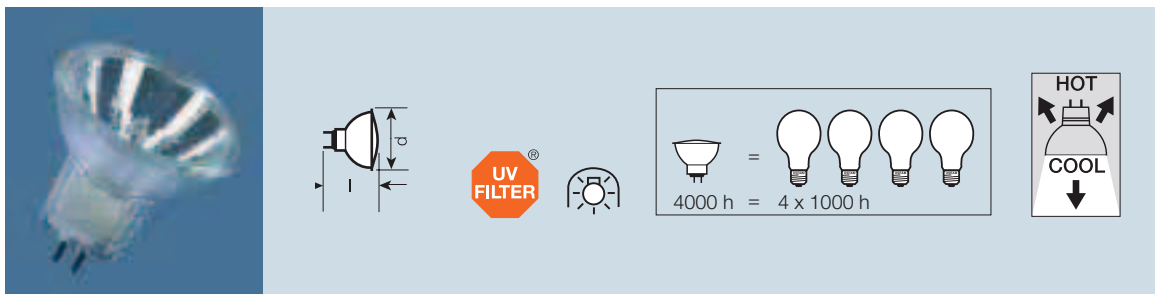

Product reference	Product number	W	V	°	cd		d max. [mm]	l max. [mm]	t [h]	
<b>DECOSTAR® 35 TITAN, Ø 35 mm</b>										
46890SP	4050300529301	20	12	10	4000	GU4	35.3	37	4000	10
46890WFL	4050300529325	20	12	36	700	GU4	35.3	37	4000	10
46892SP	4050300529349	35	12	10	6200	GU4	35.3	37	4000	10
46892WFL	4050300529363	35	12	36	1350	GU4	35.3	37	4000	10